

宁波恒力液压  
股份有限公司

A6VE内藏式变量马达 Plug-In Variable Displacement Motor A6VE

弯轴结构轴向锥形柱塞元件  
axial tapered piston rotary group of bent axis design

用于安装在机械齿轮箱中  
for mounting in mechanical gearboxes

RC91200/10.2015

规格 Size 55-160

公称压力31.5MPa 最高压力35MPa  
Nominal Pressure Peak press

替代: Replace RC91200/10.2015



A6VE内藏式变量马达装有一套弯轴结构的标准轴向锥形柱塞旋转组件。

液压内藏式马达主要用来安装在机械齿轮箱中，例如，履带驱动轮箱。

马达的安装法兰设计在壳体的中间，这种结构允许马达几乎完全装进机械齿轮箱，从而提供一个十分紧凑的部件。

内藏式马达部件的特殊优点是：

- 整个部件，已组装和试验
- 易于组装，仅需“插入”机械齿轮箱
- 不需要考虑安装公差

The variable displacement plug-in motor A6VE is equipped with a standard axial tapered piston rotary group of bent axis design.

Hydrostatic plug-in motors are intended primarily for installation in mechanical gearboxes, e.g. track drive gear boxes.

The design of the motor with the mounting flange in the center of the housing allows it to be almost fully integrated into a mechanical gearbox to give an extremely compact unit.

The particular advantages of the plug-in motor over kit designs are:

- complete unit, ready assembled and tested.
- easy assembly simply plug-in to mechanical gearboxes
- no installation tolerances to consider.

# A6VE内藏式变量马达 Plug-In Variable Displacement Motor A6VE

## 型号说明 Type Code

A6V	E	80	HA1	2	F	Z	1	039
马达型号 Motor Type								最小排量设定值 Min. Swept Volume Setting
变量马达 Variable displacement motor		A6V						例: Example. $V_{gmin} = 39 \text{ ml/r}$ 039
安装型式 Mounting Type								例: Example. $V_{gmin} = 54 \text{ ml/r}$ 054

规格 Size
排量 /ml/r displacement
15.8–54.8ml/r 55
23–80ml/r 80
30.8–107ml/r 107
46–160ml/r 160

液控变量	控制压差 $\Delta p=1 \text{ MPa}$	HDI
Hydraulic control, pilot pressure related	Pilot pressure Increase	
	控制压差 $\Delta p=2.5 \text{ MPa}$	HD2
	Pilot pressure Increase	
	恒压 Constant pressure	
高压自动变量	不带超调 With out override	HA1
Automatic control, high pressure related	升压 Pressure increase $\Delta p=10 \text{ MPa}$	HA2
	不带超调 With out override	

电控双速变量	Electrical 2-speed 12v control(with switching solenoid)24	ES1
电控比例变量	Electrical control 12v (with proportional solenoid) 24v	EP1
手动变量	Manual control (with handwheel)	EP2

最小排量设定值 Min. Swept Volume Setting	例: Example. $V_{gmin} = 39 \text{ ml/r}$ 039
例: Example. $V_{gmin} = 54 \text{ ml/r}$ 054	
装配型式 Assembly Type	
解释见变量说明及元件尺寸 For explanation see description of control device and unit dimensions	1 2
轴伸 Shaft End	
平键 GB 1096-79 花键 DIN 5480 花键 GB 3478.1-83	Keyed parallel shaft Splined shaft Splined shaft
油口连接 Pipe Connections	
SAE 法兰, 侧面 螺纹连接, 侧面	SAE flange, on side Metric threads, on side
结构型式 Series	
结构 2, 规格 Series 2, sizes 55.80.107.160	2
订货示例: A6VE80HDI2FZ 2039	Ordering Example A6VE80 HDI2FZ2039
斜轴变量马达 A6V, 内藏式 E, 规格 80, 液控变量, $\Delta p=1 \text{ MPa}$ , 结构 2, 侧面 SAE 法兰连接, 德标花键, 第 2 种装配型式。 最小排量 $V_{gmin}=39 \text{ ml/r}$	Axial-piston-variable displacement motor A6V, plug-in E size 80, with hydraulic control, pilot pressure related, $\Delta p=1 \text{ MPa}$ , series 2. SAE flange connections on side, splined shaft, assembly type 2, min. swept volume setting $V_{gmin}=39 \text{ ml/r}$

# A6VE内藏式变量马达 Plug-In Variable Displacement Motor A6VE

## 技术参数 Technical Data

### 工作压力范围: Operating Pressure Range

A或B口压力: Pressure at port A or B

额定压力 Nominal pressure  $P_n = 31.5 \text{ MPa}$

最高压力 Peak pressure  $P_{max} = 35 \text{ MPa}$

A、B油口压力总和不得超过63MPa, 每侧油口压力最高40MPa。

The sum of the pressures at ports A and B should not exceed

63MPa. (Individual pressure at either port max.35MPa)

泄油压力: Leakage oil Pressure:

允许T口最大泄油压力

Maximum permissible leakage oil pressure (at Port T)

$P_{sh} = 0.2 \text{ MPa}$

### 油温范围: Fluid Temperature Range

$t_{min} = -25^\circ\text{C}$

$t_{max} = +80^\circ\text{C}$

### 粘度范围: Viscosity Range:

$\nu_{min} = 10 \text{ mm}^2/\text{s}$

$\nu_{max} = (\text{短时})(\text{for short periods}) 1000 \text{ mm}^2/\text{s}$

### 最佳工作粘度: Optimum Operating Viscosity:

$\nu_{opt} = 16-36 \text{ mm}^2/\text{s}$

### 油液选择: Fluid Recommendation

工作温度 推荐粘度等级符合DIN51519

Operating temperature to DIN51519

range ISO(VG)

30-40°C	VG22=22mm <sup>2</sup> /s	at 40°C
40-50°C	VG32=32mm <sup>2</sup> /s	at 40°C
50-60°C	VG46=46mm <sup>2</sup> /s	at 40°C
60-70°C	VG68=68mm <sup>2</sup> /s	at 40°C
70-80°C	VG100=100mm <sup>2</sup> /s	at 40°C

### 液压油的过滤:

推荐过滤精度为10 μm。

亦可使用25-40 μm的，但使用10 μm的可以延长使用寿命(降低磨损)。

### Filtration of Hydraulic Fluid

Recommended filtration 10 μm.  
Coarser filtration of 25 to 40 μm is possible, however longer service life is achieved with filtration of 10 μm. (reduced wear).

### 转速范围:

最低转速没有限制，在要求十分均匀的转速时， $n_{min}$ 不小于50r/min。最高转速由来自泵的最大流量和变量马达的最小排量确定。

### Speed Range

No limitation on minimum Speed  $n_{min}$ . Where very even speeds are required,  $n_{min}$  should not be less than 50r/min. The maximum flow from the pump and the minimum swept volume of the variable motor together determine the maximum output speed.

### 流量

$$\text{Swept Volume } Q = \frac{V_g \cdot n}{1000 \cdot \eta_v} \quad [\text{L}/\text{min}]$$

### 输出转速

$$\text{Output Speed } n = \frac{Q \cdot 1000 \cdot \eta_v}{V_g} \quad [\text{r}/\text{min}]$$

### 输出扭矩

$$\text{Output Torque } M = \frac{V_g \cdot \Delta p \cdot \eta_{mh}}{2\pi} \quad \frac{1.59 V_g \cdot \Delta p \cdot \eta_{mh}}{10} \quad [\text{Nm}]$$

$$\text{或 or } M = \frac{K_M \cdot \Delta p \cdot \eta_{mh}}{10} \quad [\text{Nm}]$$

### 输出功率

$$\text{Output Power } P = \frac{M \cdot n}{9549} = \frac{Q \cdot \Delta p}{60} \cdot \eta_t \quad [\text{KW}]$$

$V_g$ =最大排量(ml/r)

max geometry displacement[ml/r]

$M$ =扭矩(Nm)

torque[Nm]

$\Delta p$ =压差(MPa)

differential pressure[MPa]

$n$ =转速(r/min)

speed[r/min]

$\eta_v$ =容积效率

volumetric efficiency

$\eta_{mh}$ =机械效率

mechanical-hydraulic efficiency

$\eta_t$ =总效率

overall efficiency

## 技术参数表 Technical Data

規格	size		55	80	107	160
排量	Displacement	$V_{gmax}$	ml/r	54.8	80	107
		$V_{gmin}$	ml/r	15.8	23	30.8
最大允许流量	Max. Permissible Swept volume	$Q_{gmax}$	l/min	206	268	321
最高转速	Max. speeds (在 at $Q_{max}$ 下)	$n_{max}$ 在 at $V_{gmax}$	r/min	3750	3350	3000
		$n_{max}$ 在 at $V_g < V_{gmax}$	r/min	5000	4500	4000
扭矩常数	Torque constants	$M_x$ 在 at $V_{gmax}$	Nm/MPa	8.701	12.75	16.97
		$M_x$ 在 at $V_{gmin}$	Nm/MPa	2.511	3.73	4.9
最大扭矩	Max. torque (在 at $\Delta p=35 \text{ MPa}$ )	$M_{max}$ 在 at $V_{gmax}$	Nm	304	446	594
		$M_{max}$ 在 at $V_{gmin}$	Nm	88	130	171
最大输出功率(在 35MPa 和 $Q_{max}$ 下)	Max. output power(at 35MPa and $Q_{max}$ )	kW	120	156	187	247
惯性矩	Moment	kgm <sup>2</sup>	0.0042	0.008	0.0127	0.0253
重量	Weight	kg	26	34	45	64


# A6VE内藏式变量马达 Plug-In Variable Displacement Motor A6VE

## 外形尺寸 Unit Dimensions

规格Size 55-160


HA 高压自动变量 Control

装配形式1 Assembly type1

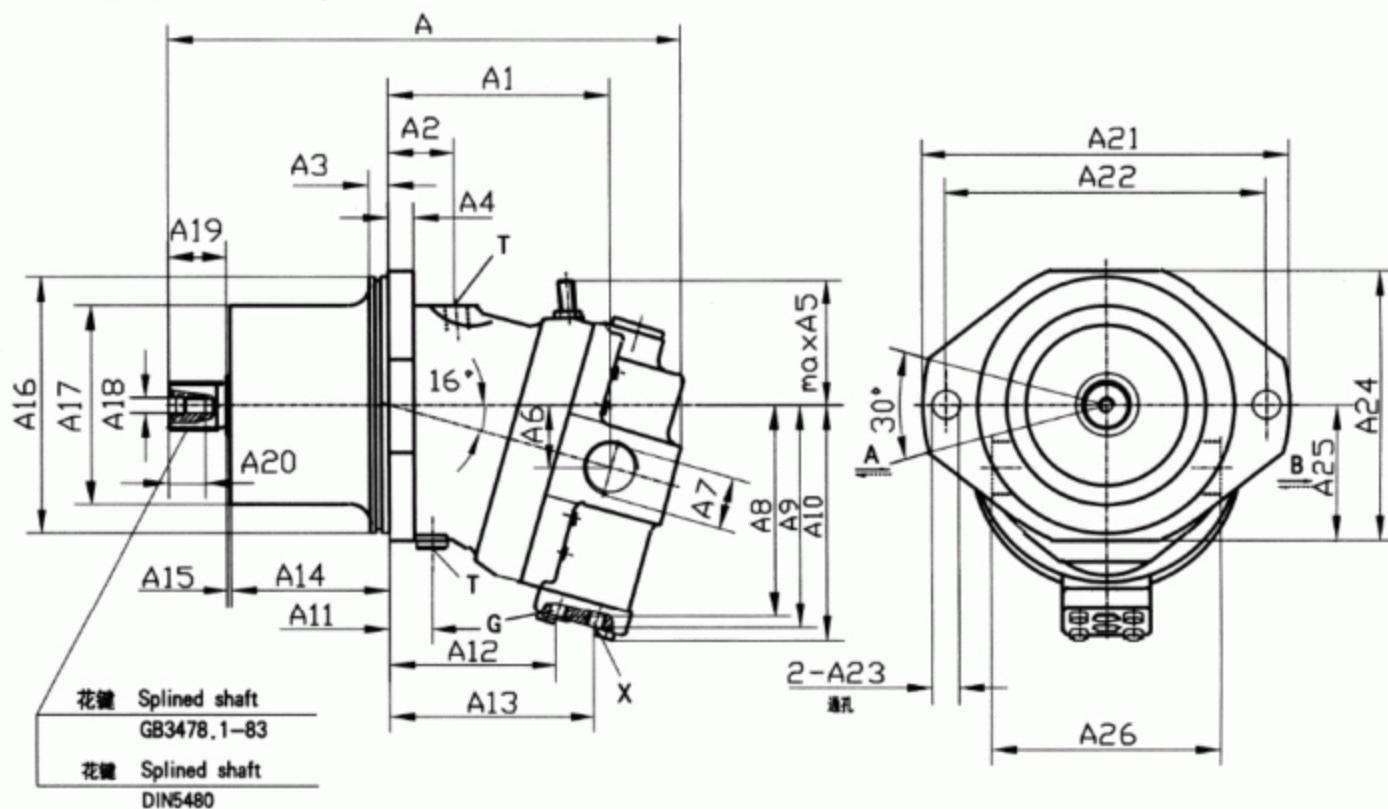

HD 液控变量

装配形式 2 Assembly type2

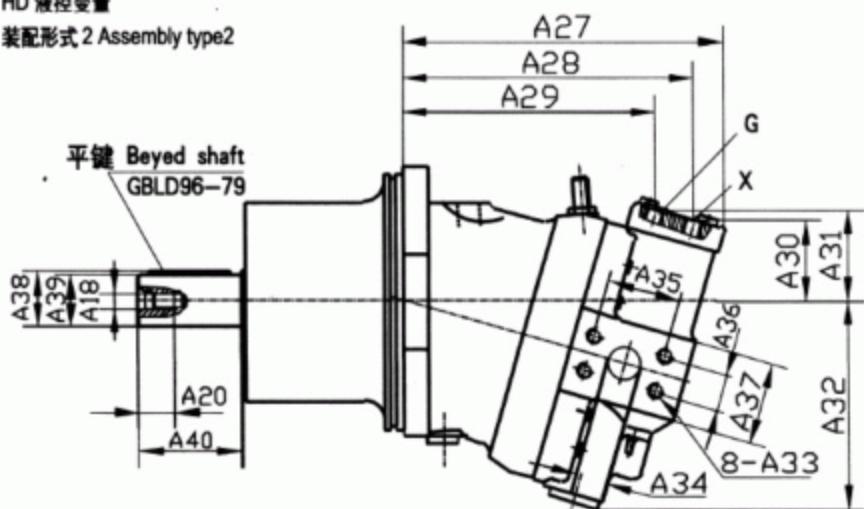

A,B 工作油口

service port

G 多元件同步控制和遥控压力油口 M14 × 1.5

port for synchronous control of multiple units and for remote control pressure

X 先导油口 M22 × 1.5

pilot pressure

T 壳体、泄油口 8-A33 M14 × 1.5

case drain

## A6VE内藏式变量马达 Plug-In Variable Displacement Motor A6VE

### 规格

Size	A	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	A14	A15	A16	A17	A18
55	319.1	141	18	15	18	75	40	33	133	141	153	18	100	127	90	1.1	160	120	M12
80	382	160	18	15	20	95	46	42	152	161	177	25	115	145	108	3	190	139.3	M12
107	395	171	20	15	20	98	49	42	164	173	188	20	129	158	121.8	1.2	200	155	M12
160	447.2	200.4	59.4	15	20	108	57	48	182.5	193	201	23.3	148.9	184.4	121.7	3.5	200	170	M16

规格 深

size	A19	A20	A21	A22	A23	A24	A25	A26	A27	A28	A29	A30	A31	A32	A33	deep	A34	A35	A36
55	35	28	235	200	18	166	83	142	204	183	156	52	60	132	M10	17	20	50.8	23.8
80	53	28	260	224	22	196	98	172	229.5	208	179	59	68	137	M12	18	25	57.2	27.8
107	45	28	286	250	22	208	104	178	248	226	196	63	71	162	M12	18	25	57.2	27.8
160	55	36	290	250	22	224	120	208	286.4	258.4	223.4	66	77	182	M14	21	32	66.7	31.8

规格 平键 花键 花键

size	A37	A38	A39	A40	A	B	T	GB1096-79	DIN580	GB3478.1-83
55	53	32.9	30	60	M33×2	M33×2	M18×1.5	键8×50	W30×2×14×9g	EXT14Z×2m×30p×5h
80	64	38	35	70	M42×2	M42×2	M18×1.5	键10×56	W35×2×16×9g	EXT16Z×2m×30p×5h
107	64	43.1	40	80	M42×2	M42×2	M18×1.5	键12×63	W40×2×18×9g	EXT18Z×2m×30p×5h
160	70	53.5	50	100	M48×2	M48×2	M22×1.5	键14×80	w50×2×24×9g	EXT24Z×2m×30R×5h

规格 G X

### size

55	M14×1.5	M14×1.5
80	M14×1.5	M14×1.5
107	M14×1.5	M14×1.5
160	M14×1.5	M14×1.5